

S 5 - 40

S 15 - 15

S 24 - 10

DELTA ELEKTRONIKA BV



P.O. BOX 27
4300 AA ZIERIKZEE
NETHERLANDS
TEL. (01110) 3656 TLX 55349



SWITCHED MODE POWER SUPPLIES

Type	CV	CC	Adjustment range
S 5-40	0 - 5 V	0 - 40 A	0 - 6 V
S 15-15	0 - 15 V	0 - 15 A	0 - 18 V
S 24-10	0 - 24 V	0 - 10 A	0 - 30 V

High efficiency: Typical 76 % at 5 V 40 A and 86 % at 24 V 10 A


Wide input voltage range: 185-265 V 50-60 Hz or 250-360 V DC

Or after connecting an internal link: 96-132 V 50-60 Hz

Soft start circuit for low inrush current during switch on.

Choke input to improve the waveform of the input current during operation.




Because of the nature of the off line rectifying circuit used in an SMPS, high peak currents are taken from the mains which cause line frequency distortion. This low frequency distortion is not rejected by the RFI input filter. To overcome this problem, in the S-series an extra iron cored LF choke is used as well as the RFI filter.

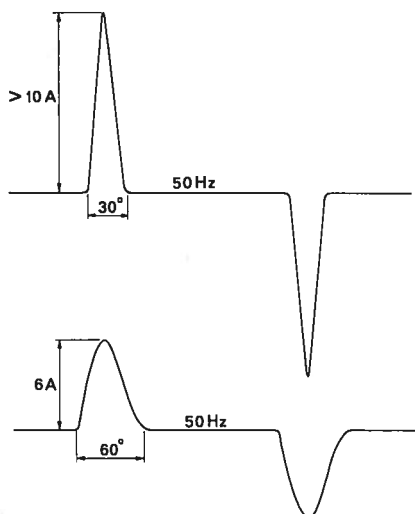




Input current of
240 W units of
other manufacturers.

Input current of
DELTA 240 W
S-series.

Maximum output current as function of the output voltage with lowest AC line

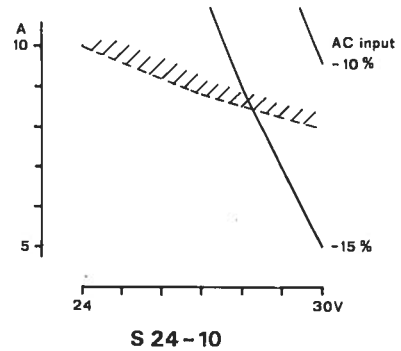

Constant Voltage / Constant Current regulation:



Load regulation (0-100%) : 10 mV
Line regulation (185-265 V AC) : 10 mV

Ripple and noise RMS/p-p : 20/50 mV

Temperature coeff. per °C : 1.10^{-4}

Recovery time : 0.5 mS for recovery to within 30 mV after a load step from 10 to 100 %

Output impedance at 100 kHz : 0.1 Ohm

Efficiency:

Typical 86% at 24 V 10 A
 80% at 15 V 15 A
 76% at 5 V 40 A

The efficiency is practically independent of the input voltage and still very good at lower output voltages and currents.

Input power at no load is about 6 Watts.

RFI suppression:




According to VDE 0875
 N-12 db on input
 N on output

Typical RFI suppression measured at the input of the S-series.

Hold-up time: An input voltage interruption of 35 mS max. (at 220 V AC) does not affect the output voltage.

Remote sensing:

Connections are provided for remote sensing at the load point. The Voltage drop should not exceed 1V per load line. The OVP has to be set higher accordingly.

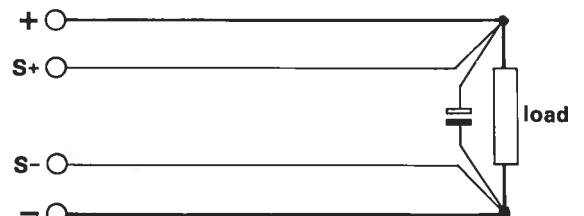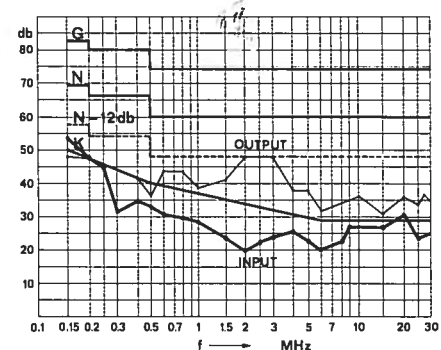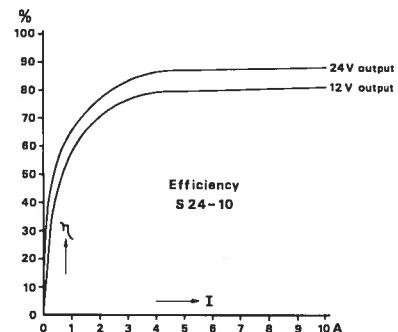


Remote programming:

The output voltage can be programmed by an external programming voltage.

The programming voltage ranges from 0 to approximately 6 V for full output swing.

To program voltage by voltage remove the link between pin 24 and pin 26 and connect the positive side of the programming voltage to pin 26 and the negative side to pin 14. The max. programming speed is 300 V/sec. However the electrolytic output capacitors will overheat at a combined high programming amplitude and repetition frequency.

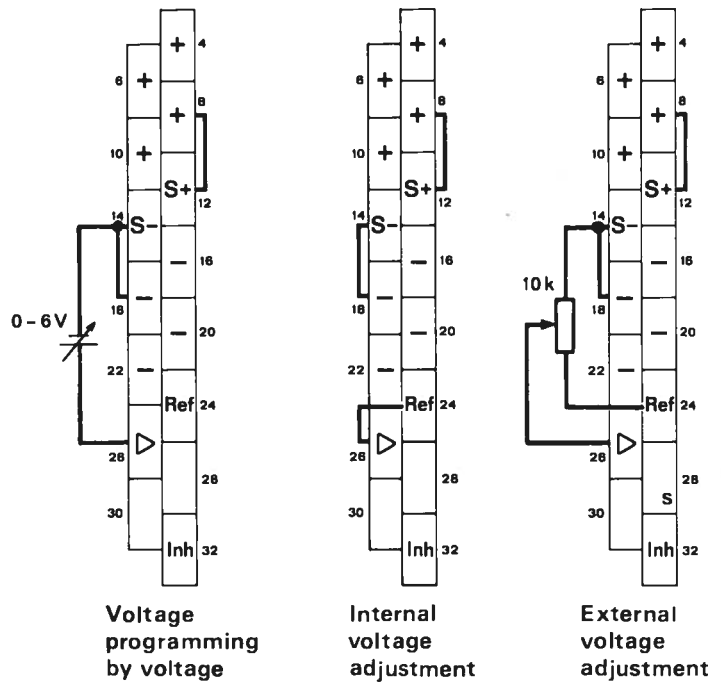

Logic inhibit function:

Logic 1 between INH (pin 32) and S- (pin 14) inhibits output.

Logic 0 between INH (pin 32) and S- (pin 14) enables output.

Parallel and series connection:


Is allowed up to 250 V combined sum

Adjustment of voltage, current and OVP:

By 20-turn screw adjustment through top cover

Led lamp on front panel indicates output state.

Current derating as function of ambient temperature and duty cycle:

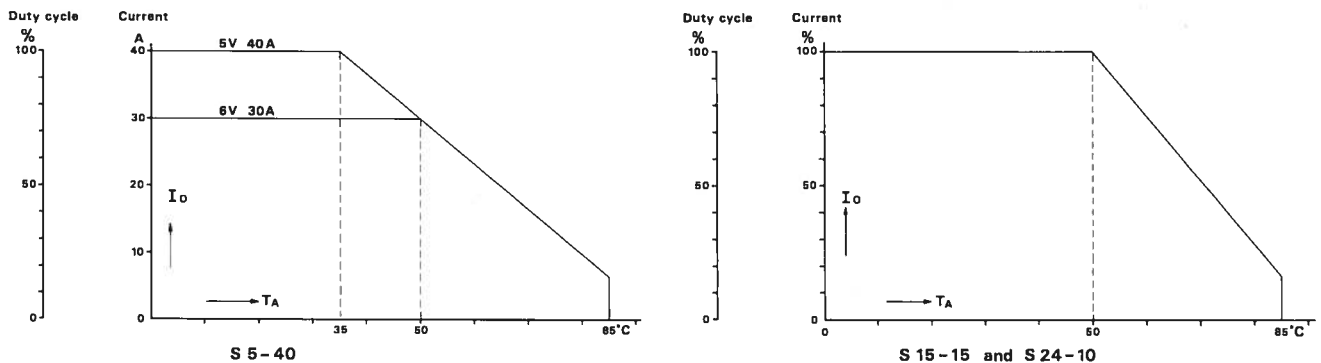

At a duty cycle lower than 100 % full output current is allowed at a higher ambient temperature. Restriction on duty cycle is: Max. on time 15 min.

Thermal shut down: At thermal overload the output shuts down.

Overload protection: May continuously be overloaded or short circuited.

Overvoltage protection: An electronic overvoltage protection shuts down the output if it exceeds the set value. The adjustment range is 5-35 V.

Delay caused by soft start: The output is available approximately 250 mS after switch-on.

Insulation:


	Test voltage	Resistance (measured at 500 V)
Input - output	2.5 kV RMS (1 minute)	50 MOhm
Input - case	2.5 kV RMS (1 minute)	50 MOhm
Output - case	500 V RMS (1 minute)	50 MOhm
	500 V DC (continuously)	

Input current: At full load 1.8 A RMS at 220 V 50 Hz Fuse 2.5 A slow blow
 3.4 A RMS at 110 V 50 Hz Fuse 5.0 A slow blow




Weight: 2,75 Kg.


Dimensions: Europa cassette 38 TE width, 194,5 x 106 x 166 mm (W x H x D).
 Separate 40 TE front panel available.

Mounting: Horizontal in order to allow a vertical air flow through the unit;
 a requirement for natural convection cooling.

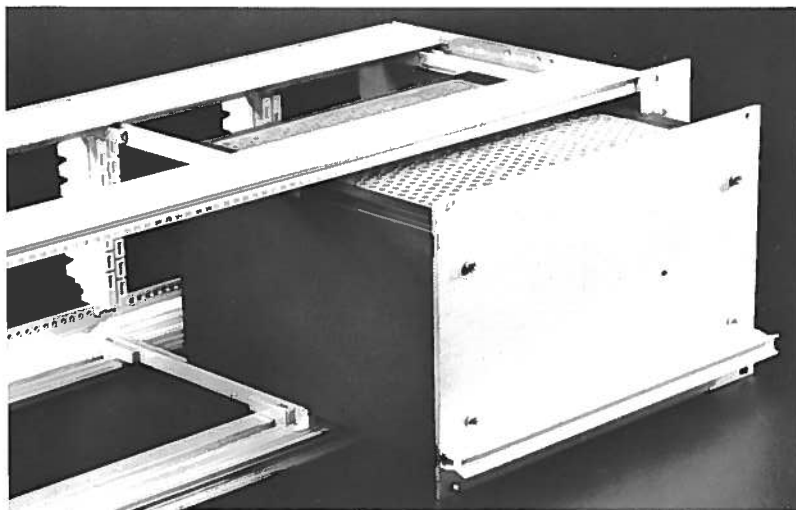


The 240 W S-series fits into a 19" Europa card rack.
 The width is 38 TE.
 A 40 TE front panel can be ordered separately.

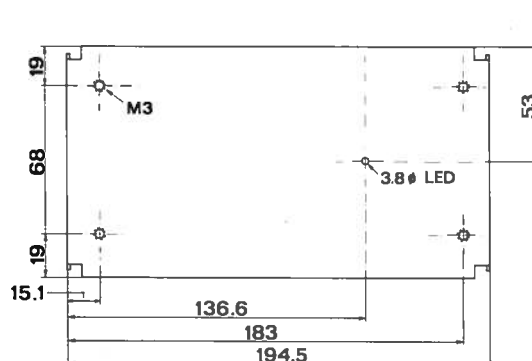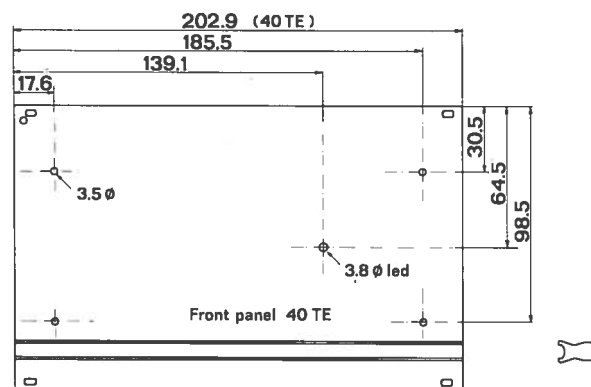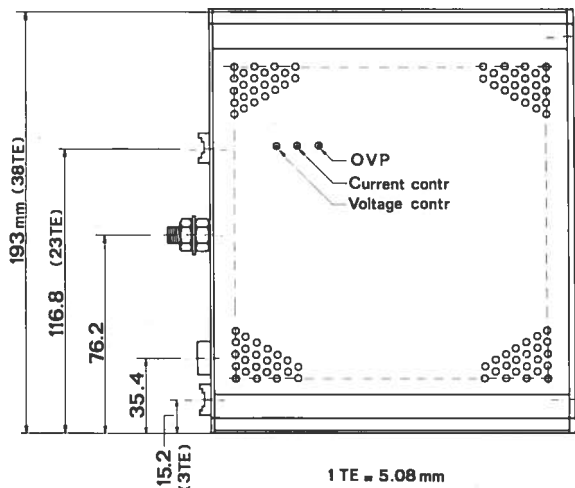

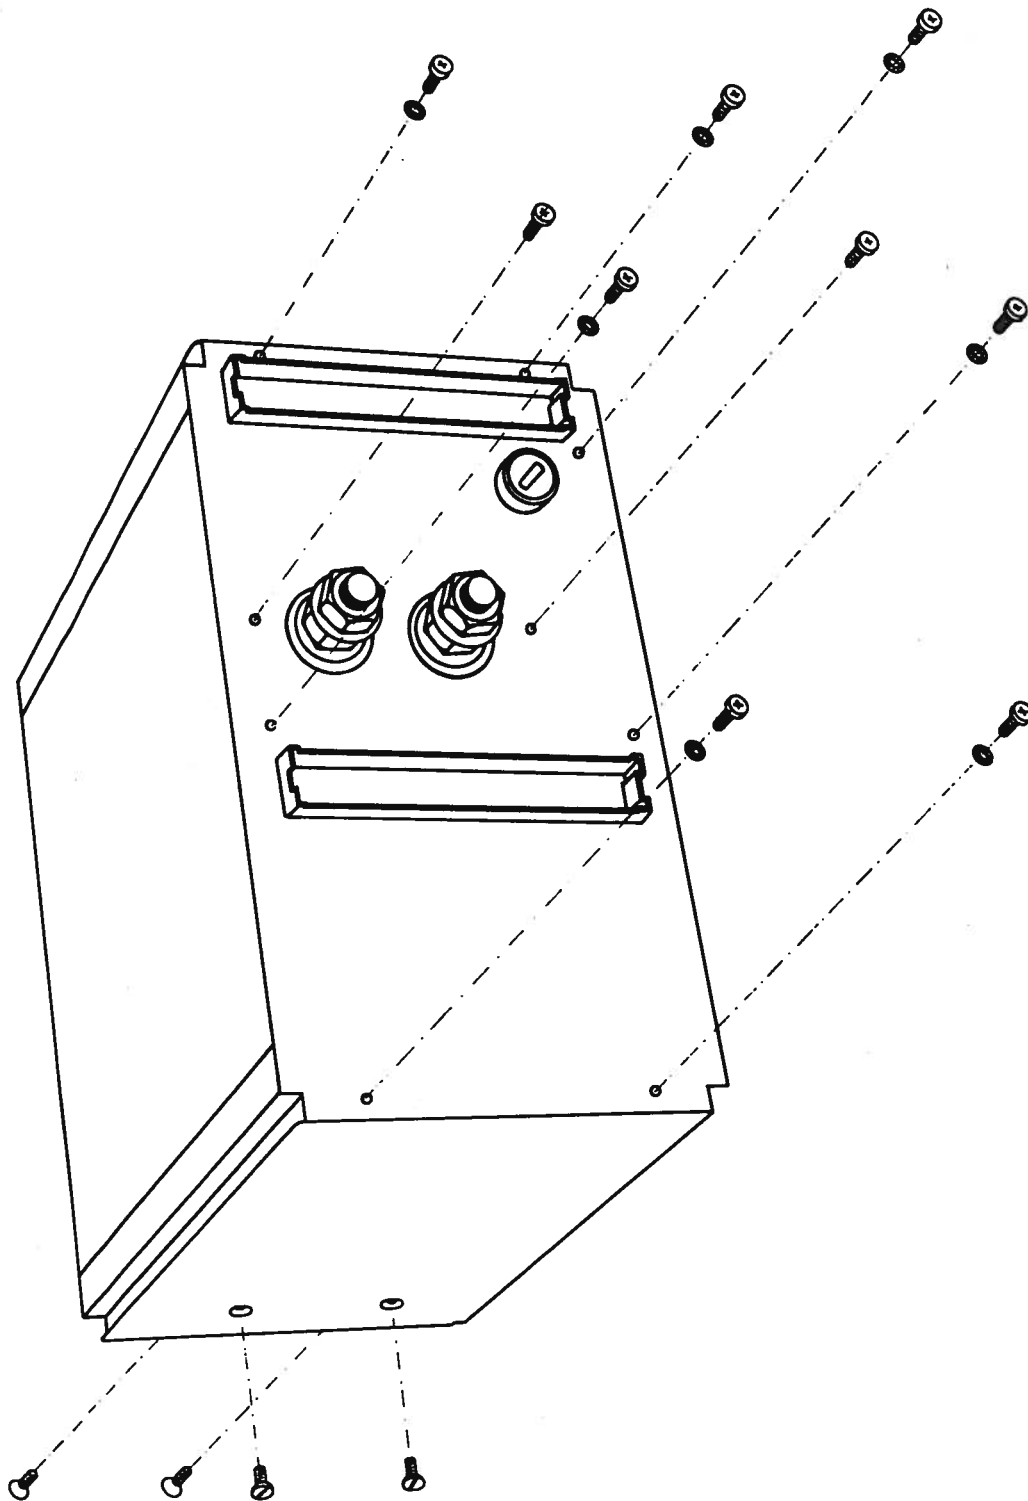

Title: ext fixings assembly		S 5-40, S15-15, S24-10	
Date: 6-'80		App	
Modifications		Date	
		delta elektronika bv	

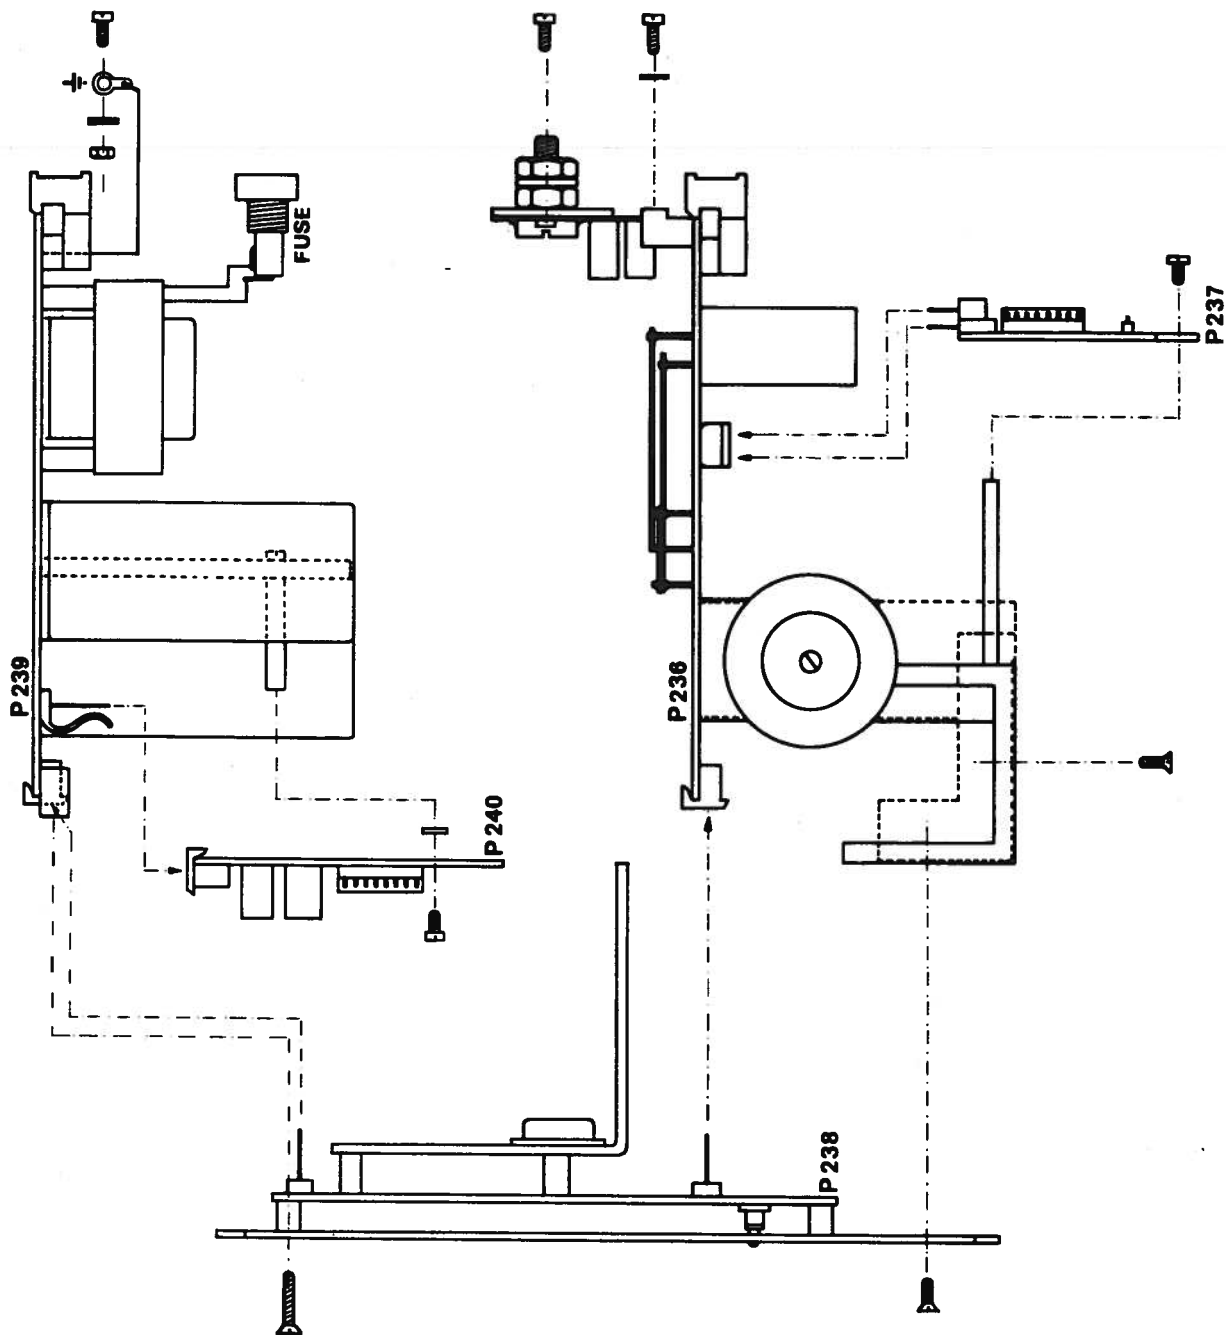

Title: assembly diagram		Date App	
S 5-40, S 15-15, S 24-10		Date	
Date: 2-'80		delta elektronika bv	
Modifications	Date	App	

S 5-40

S 15-15

S 24-10

R = Ohm

1 = 47 7 W WW
 2 = 390
 3 = 270
 4 = 270
 5 = 4,7
 6 = 22
 7 = 1,2 k 10 W WW
 8 = 8,2
 9 = 560
 10 = CR
 11 = 330
 12 = 10 k potm. 20 trn.
 13 = 470
 14 = 0,00075
 15 = 1 k potm. 20 trn.
 16 = 1 k
 17 = 330
 18 = 100
 19 = 330
 20 = 68 k
 21 = 56 k
 22 = CR
 23 = 1 k
 24 = 560 k
 25 = 270 k
 26 = 82 k 0,7 W
 27 = 82 k 0,7 W
 28 = -
 29 = 680
 30 = 12 k
 31 = 68 k
 32 = 15 k
 33 = 1 k
 34 = 820
 35 = 3,3 k
 36 = 39
 37 = 10 k
 38 = -
 39 = -
 40 = 10
 41 = 6,8 k
 42 = CR
 43 = CR
 44 = 22 k
 45 = 33 k
 46 = 1 k
 47 = 1 k
 48 = 470
 49 = 100 k
 50 = 1 k
 51A = 150 k
 52A = 150 k

47 7 W WW
 390
 270
 270
 4,7
 22
 1,2 k 10 W WW
 3,9
 560
 CR
 330
 10 k potm. 20 trn.
 470
 0,002
 1 k potm. 20 trn.
 1 k
 330
 1 k
 330
 68 k
 56 k
 CR
 1 k
 560 k
 270 k
 82 k 0,7 W
 82 k 0,7 W
 -
 680
 12 k
 68 k
 15 k
 1 k
 820
 3,3 k
 39
 10 k
 -
 -
 10
 6,8 k
 CR
 CR
 CR
 22 k
 33 k
 1 k
 1 k
 470
 100 k
 1 k
 150 k
 150 k

47 7 W WW
 390
 270
 270
 4,7
 22
 1,2 k 10 W WW
 3 x 100 PR 37
 560
 CR
 330
 10 k potm. 20 trn.
 470
 0,003
 1 k potm. 20 trn.
 1 k
 330
 3,3 k
 330
 68 k
 56 k
 CR
 1 k
 560 k
 270 k
 82 k 0,7 W
 82 k 0,7 W
 -
 680
 12 k
 68 k
 15 k
 1 k
 820
 3,3 k
 39
 10 k
 -
 -
 10
 6,8 k
 CR
 CR
 CR
 22 k
 33 k
 1 k
 1 k
 470
 100 k
 1 k
 150 k
 150 k

R 34 = 820 Ω / R 48 = 470 Ω		7-'86	Ur	Title: Part list
R 8 (S 24-10)		6-'85	Ur	Date: 6-'80
Modifications		Date	App	delta elektronika bv

δ

S 5-40R = Ohm

51 =	1 k	
52 =	12 k	
53 =	180 k	
54 =	CR	
55 =	2,7 k	
56 =	1 k	
57 =	1 k	
58 =	15 k	
59 =	82 k	
60 =	4,7 k	
61 =	680	
62 =	2,7 k	
63 =	150	
64 =	5 k	potm. 20 trn.
65 =	1 k	
66 =	4,7	
67 =	CR	
68 =	CR	
69 =	10 k	
70 =	1,2 k	10 W WW
71 =	12	
72 =	100	
73 =	2,2 k	
74 =	—	
75 =	2,2 k	

CR = Calibration resistor

WW = wire wound

all other resistors 0,4W 2% metal film

S 15-15

1 k	
12 k	
270 k	
CR	
8,2 k	
1 k	
1 k	
4,7 k	
27 k	
4,7 k	
680	
2,7 k	
150	
5 k	potm. 20 trn.
1 k	
4,7	
CR	
CR	
10 k	
1,2 k	10 W WW
—	
100	
2,2 k	
—	
2,2 k	

S 24-10

1 k	
12 k	
270 k	
CR	
12 k	
1 k	
1 k	
3,3 k	
56 k	
4,7 k	
680	
2,7 k	
150	
5 k	potm. 20 trn.
1 k	
4,7	
CR	
CR	
10 k	
1,2 k	10 W WW
—	
100	
2,2 k	
—	
2,2 k	

<u>T</u> 1 =	BUX 98
2 =	2 N 2907 A
3 =	2 N 3053
4 =	BUX 86
5 =	2 N 2222 A
6 =	2 N 2907 A
7 =	BS 250
8 =	VN 66 AF
9 =	VN 66 AF
10 =	2 N 2907 A
11 =	2 N 2222 A
12 =	2 N 2907 A
13 =	2 N 2907 A

BUX 98
2 N 2907 A
2 N 3053
BUX 86
2 N 2222 A
2 N 2907 A
BS 250
VN 66 AF
VN 66 AF
2 N 2907 A
2 N 2222 A
2 N 2907 A
2 N 2907 A

BUX 98	Sescosem
2 N 2907 A	Sescosem
2 N 3053	RCA
BUX 86	Philips
2 N 2222 A	Sescosem
2 N 2907 A	Sescosem
BS 250	J.M.
VN 66 AF	Siliconix
VN 66 AF	Siliconix
2 N 2907 A	Sescosem
2 N 2222 A	Sescosem
2 N 2907 A	Sescosem
2 N 2907 A	Sescosem

IC

1 =	HEF 4049 BP
2 =	HEF 4049 BP
3 =	TL 082 IP

HEF 4049 BP
HEF 4049 BP
TL 082 IP

HEF 4049 BP	Philips
HEF 4049 BP	Philips
TL 082 IP	TI

Bux 48 = Bux 98	4-86	Ur.	
JC 3 (P2371)	2-86	Ur.	Title: Part list
T7, R74	1-84	Ur.	
R55, 59, 62, 63, 75	5-83	Ur.	Date: 6-80
Modifications	Date	App.	delta elektronika bv



S 5-40

S 15-15

S 24-10

C

1 =	0,22	μF	250 V ~ X
2 =	4,7	nF	250 V ~ Y
3 =	0,22	μF	250 V ~ X
4 =	4,7	nF	250 V ~ Y
5 =	800	μF	200 V -
6 =	800	μF	200 V -
7 =	0,1	μF	400 V -
8 =	1	μF	250 V -
9 =	4,7	μF	63 V -
10 =	1,8	nF	2000 V -
11 =	10	nF	500 V -
12 =	10	nF	250 V -
13 =	4700	μF	16 V -
14 =	4700	μF	16 V -
15 =	15	μF	16 V -
16 =	15	μF	16 V -
17 =	0,22	μF	63 V -
18 =	4700	μF	16 V -
19 =	0,22	μF	63 V -
20 =	15	μF	16 V -
21 =	15	μF	16 V -
22 =	0,22	μF	250 V ~ X
23 =	1	μF	63 V -
24 =	0,22	μF	250 V ~ X
25 =	0,22	μF	63 V -
26 =	0,1	μF	400 V -
27 =	15	pF	500 V -
28 =	150	pF	630 V -
29 =	470	pF	160 V -
30 =	100	μF	10 V -
31 =	10	nF	250 V -
32 =	150	pF	1600 V -
33 =	47	μF	40 V -
34 =	15	μF	16 V -
35 =	1	nF	630 V -
36 =	470	pF	630 V -
37 =	22	nF	250 V -
38 =	10	nF	250 V -
39 =	470	pF	160 V -
40 =	22	nF	250 V -
41 =	470	pF	160 V -
42 =	470	pF	160 V -
43 =	10	nF	250 V -
44 =	470	pF	160 V -
45 =	470	pF	160 V -
46 =	47	nF	250 V -
47 =	2,2	μF	16 V -
48 =	2,2	μF	16 V -
49 =	4,7	μF	63 V -
50 =	4,7	μF	63 V -

0,22	μF	250 V ~ X
4,7	nF	250 V ~ Y
0,22	μF	250 V ~ X
4,7	nF	250 V ~ Y
800	μF	200 V -
800	μF	200 V -
0,1	μF	400 V -
1	μF	250 V -
4,7	μF	63 V -
1,8	nF	2000 V -
10	nF	500 V -
10	nF	250 V -
2200	μF	40 V -
2200	μF	40 V -
15	μF	16 V -
15	μF	16 V -
0,22	μF	63 V -
2200	μF	40 V -
0,22	μF	63 V -
15	μF	16 V -
15	μF	16 V -
0,22	μF	250 V ~ X
1	μF	63 V -
0,22	μF	250 V ~ X
0,22	μF	63 V -
0,1	μF	400 V -
15	pF	500 V -
150	pF	630 V -
470	pF	160 V -
100	μF	10 V -
10	nF	250 V -
150	pF	1600 V -
47	μF	40 V -
15	μF	16 V -
1	nF	630 V -
470	pF	630 V -
22	nF	250 V -
10	nF	250 V -
470	pF	160 V -
22	nF	250 V -
470	pF	160 V -
470	pF	160 V -
10	nF	250 V -
470	pF	160 V -
470	pF	160 V -
47	nF	250 V -
2,2	μF	16 V -
2,2	μF	16 V -
4,7	μF	63 V -
4,7	μF	63 V -

0,22	μF	250 V ~ X
4,7	nF	250 V ~ Y
0,22	μF	250 V ~ X
4,7	nF	250 V ~ Y
800	μF	200 V -
800	μF	200 V -
0,1	μF	400 V -
1	μF	250 V -
4,7	μF	63 V -
1,8	nF	2000 V -
3300	pF	1000 V -
10	nF	250 V -
1000	μF	63 V -
1000	μF	63 V -
15	μF	16 V -
15	μF	16 V -
0,22	μF	63 V -
1000	μF	63 V -
0,22	μF	63 V -
15	μF	16 V -
15	μF	16 V -
0,22	μF	250 V ~ X
1	μF	63 V -
0,22	μF	250 V ~ X
0,22	μF	63 V -
0,1	μF	400 V -
15	pF	500 V -
150	pF	630 V -
470	pF	160 V -
100	μF	10 V -
10	nF	250 V -
150	pF	1600 V -
47	μF	40 V -
15	μF	16 V -
1	nF	630 V -
470	pF	630 V -
22	nF	250 V -
10	nF	250 V -
470	pF	160 V -
22	nF	250 V -
470	pF	160 V -
470	pF	160 V -
10	nF	250 V -
470	pF	160 V -
470	pF	160 V -
47	nF	250 V -
2,2	μF	16 V -
2,2	μF	16 V -
4,7	μF	63 V -
4,7	μF	63 V -

			Title: Part list
C56, C39	5		
CC 11, C55	6-8s	Vr	Date: 6-'80
Modifications	Date	App.	delta elektronika bv

δ

S 5-40S 15-15S 24-10C

51 =	68	nF	250 V ~	68	nF	250 V ~	68	nF	250 V ~
52 =	2,2	μF	16 V -	2,2	μF	16 V -	2,2	μF	16 V -
53 =	2,2	μF	16 V -	2,2	μF	16 V -	2,2	μF	16 V -
54 =	2,2	nF	500 V -	—			—		
55 =	100	pF	500 V -	100	pF	500 V -	100	pF	500 V -
56 =	10	nF	50 V -	10	nF	50 V -	10	nF	50 V -
57 =	470	pF	500 V -	470	pF	500 V -	470	pF	500 V -
58 =	470	pF	500 V -	470	pF	500 V -	470	pF	500 V -

L 1	=	68 μH	Secré
S 75	=	prim. choke	delta
L 115	=	sec. choke 10 A	delta
L 116	=	sec. choke 15 A	delta
L 117	=	sec. choke 40 A	delta
T 120	=	aux. supply transformer	delta
T 124	=	curr. transformer	delta
L 126	=	sec. RFI inductance 5 V	delta
L 127	=	sec. RFI inductance 15 V, 24 V	delta
T 129	=	transformer 5 V	delta
T 130	=	transformer 15 V	delta
T 131	=	transformer 24 V	delta
L 132	=	saturable inductance	delta
L 134	=	prim. RFI inductance B 82724-G2-A013	Siemens
L 135	=	switch-off inductance 15 μH 22-26	secre
T 136	=	driver transformer	delta
L 228	=	saturable inductance	delta

L1 (P237)	2.86	Ur	Title: Part list
L 228 (S24-10)	6.85	Ur	S 5-40, S 15-15, S 24-10
C 57, 58	2.85	Ur	Date: 6-'80
Modifications	Date	App.	delta elektronika bv

δ

S 5-40D

1 = T 2800 D
 2 = VJ 1048
 3 = BYV 96D
 4 = ZPY 6,2
 5 = BYT 12 P 800
 6 = BYV 96D
 7 = BY 218-800
 8 = BY 218-800
 9 = VSK 51 Varo
 10 = VSK 51 Varo
 11 = 1 N 4148
 12 = -
 13 = TL 431 ILP
 14 = TIL 209 A
 15 = 1 N 4148
 16 = ZPD 6,2
 17 = 1 N 4148
 18 = BYV 96D
 19 = BYV 96D
 20 = BZV 15 C 12
 21 = -
 22 = BYV 96D
 23 = 1 N 4148
 24 = 1 N 4148
 25 = 1 N 4148
 26 = 1 N 4148
 27 = 1 N 4148
 28 = 1 N 4148
 29 = PO 102 BA
 30 = 1 N 4148
 31 = 1 N 4148
 32 = 1 N 4148
 33 = 1 N 4148
 34 = 1 N 4148
 35 = 1 N 4148
 36 = 1 N 4148
 37 = ZPD 5,6
 38 = ZPD 6,8
 39 = 1 N 825
 40 = ZPY 24
 41 = ZPY 24
 42 = ZPD 3,3
 43 = ZPD 12
 44 = 1 N 4148
 45 = ZPY 51
 46 = ZPY 51
 47 = BYV 96 D
 48 = BYV 96 D

S 15-15

T 2800 D
 VJ 1048
 BYV 96D
 ZPY 6,2
 BYT 12 P 800
 BYV 96D
 BY 218-800
 BY 218-800
 BYW 92-150
 BYW 92-150
 1 N 4148
 -
 TL 431 ILP
 TIL 209 A
 1 N 4148
 ZPD 6,2
 1 N 4148
 BYV 96D
 BYV 96D
 BZV 15 C 12
 -
 BYV 96D
 1 N 4148
 1 N 4148
 1 N 4148
 1 N 4148
 1 N 4148
 1 N 4148
 1 N 4148
 PO 102 BA
 1 N 4148
 1 N 4148
 1 N 4148
 1 N 4148
 1 N 4148
 1 N 4148
 1 N 4148
 ZPD 5,6
 ZPD 6,8
 1 N 825
 -
 -
 ZPD 3,3
 ZPD 12
 1 N 4148
 ZPY 51
 ZPY 51
 -
 -

S 24-10

T 2800 D RCA
 VJ 1048 Varo
 BYV 96D Philips
 ZPY 6,2 ITT
 BYT 12 P 800 Thom.
 BYV 96D Philips
 BY 218-800 Sescosem
 BY 218-800 Sescosem
 BYW 77/180A Thom.
 BYW 77/180A Thom.
 1 N 4148 TI
 -
 TL 431 ILP TI
 TIL 209 A TI
 1 N 4148 TI
 ZPD 6,2 ITT
 1 N 4148 TI
 BYV 96D Philips
 BYV 96D Philips
 BZV 15 C 12 Philips
 -
 BYV 96D Philips
 1 N 4148 TI
 1 N 4148 TI
 1 N 4148 TI
 1 N 4148 TI
 1 N 4148 TI
 1 N 4148 TI
 1 N 4148 TI
 PO 102 BA TAG
 1 N 4148 TI
 1 N 4148 TI
 1 N 4148 TI
 1 N 4148 TI
 1 N 4148 TI
 1 N 4148 TI
 1 N 4148 TI
 ZPD 5,6 ITT
 ZPD 6,8 ITT
 1 N 825 IR
 - ITT
 - ITT
 - ITT
 ZPD 3,3 ITT
 ZPD 12 ITT
 1 N 4148 TI
 ZPY 51 ITT
 ZPY 51 ITT
 - Philips
 - Philips

F 1 = fuse 2,5A (220V) 5A (110V) type EAK 5 x 20 mm


F 2 = fuse 250 mA

F 3 = fuse 4A (little fuse)


TS = Thermostats OP 62 - 90 °C ± 5%

			Title: Part list
D47, 48 (S5-40)	1-'86	Ur	
D5	2-'85	Ur	Date: 6-'80
Modifications	Date	App.	delta elektronika bv


δ

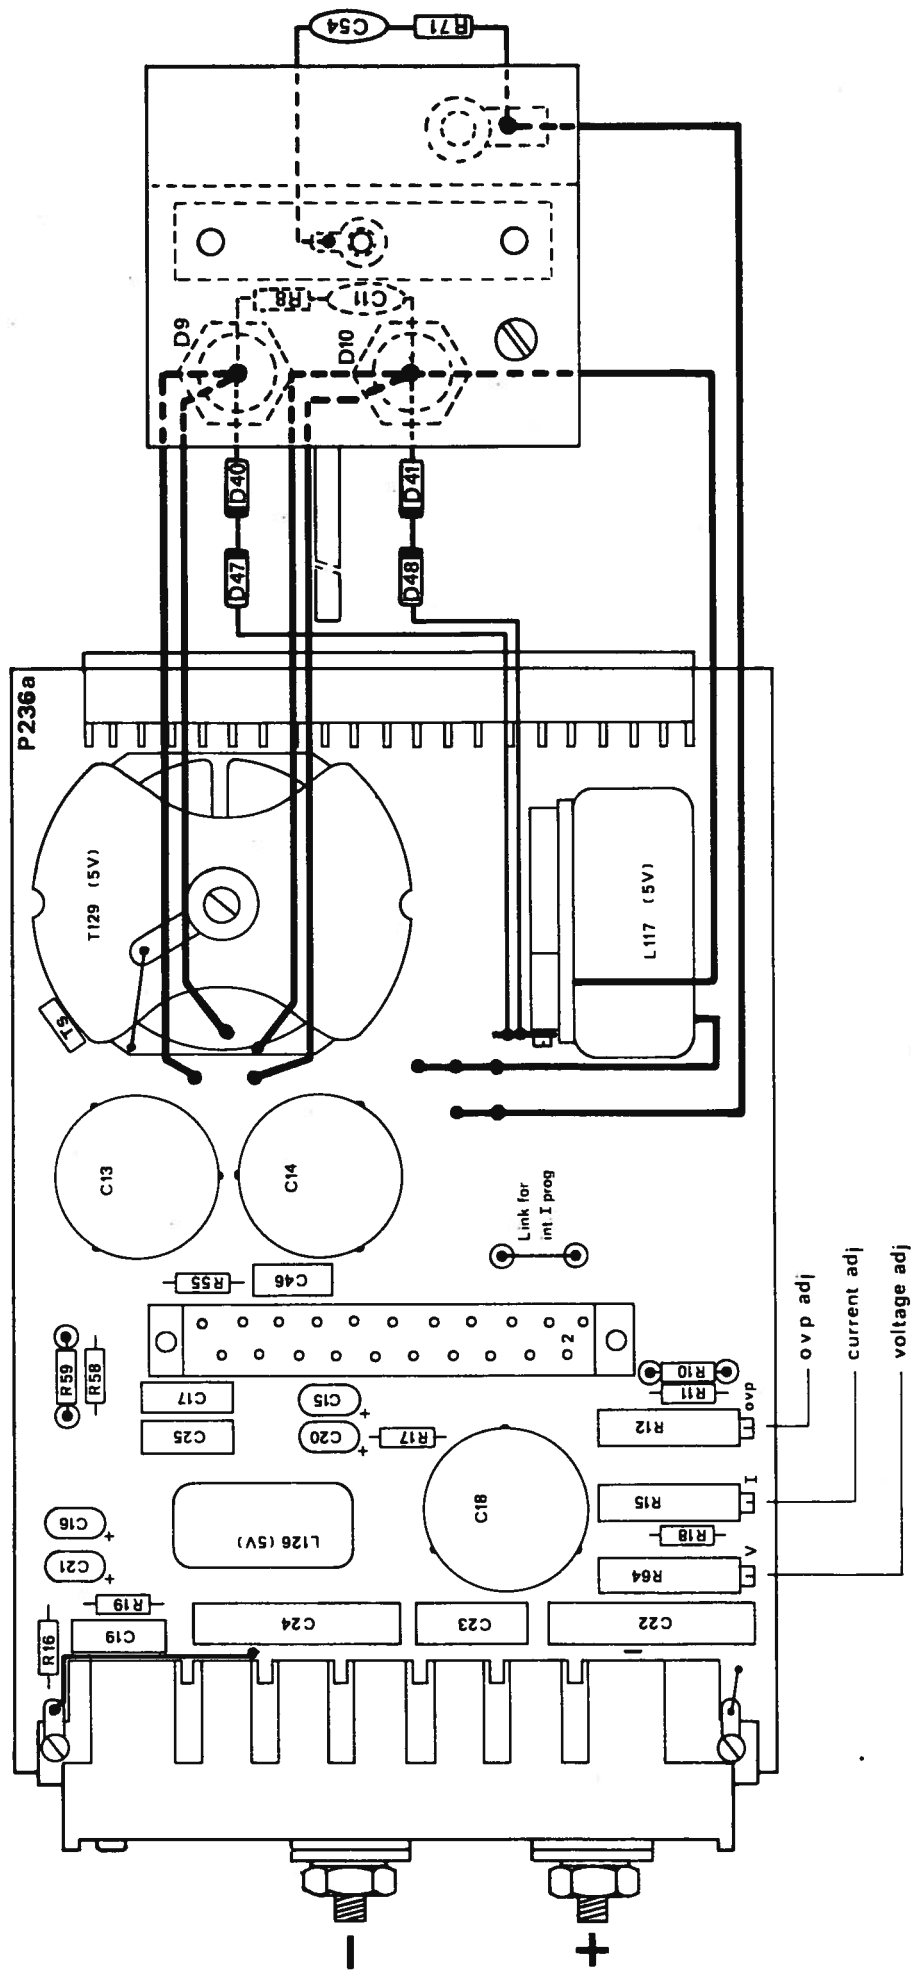


Title: PC board		S 5 - 40	
D47, 48		Date: 2 - '80	
Modifications		App	
		Date	
		delta elektronika bv	

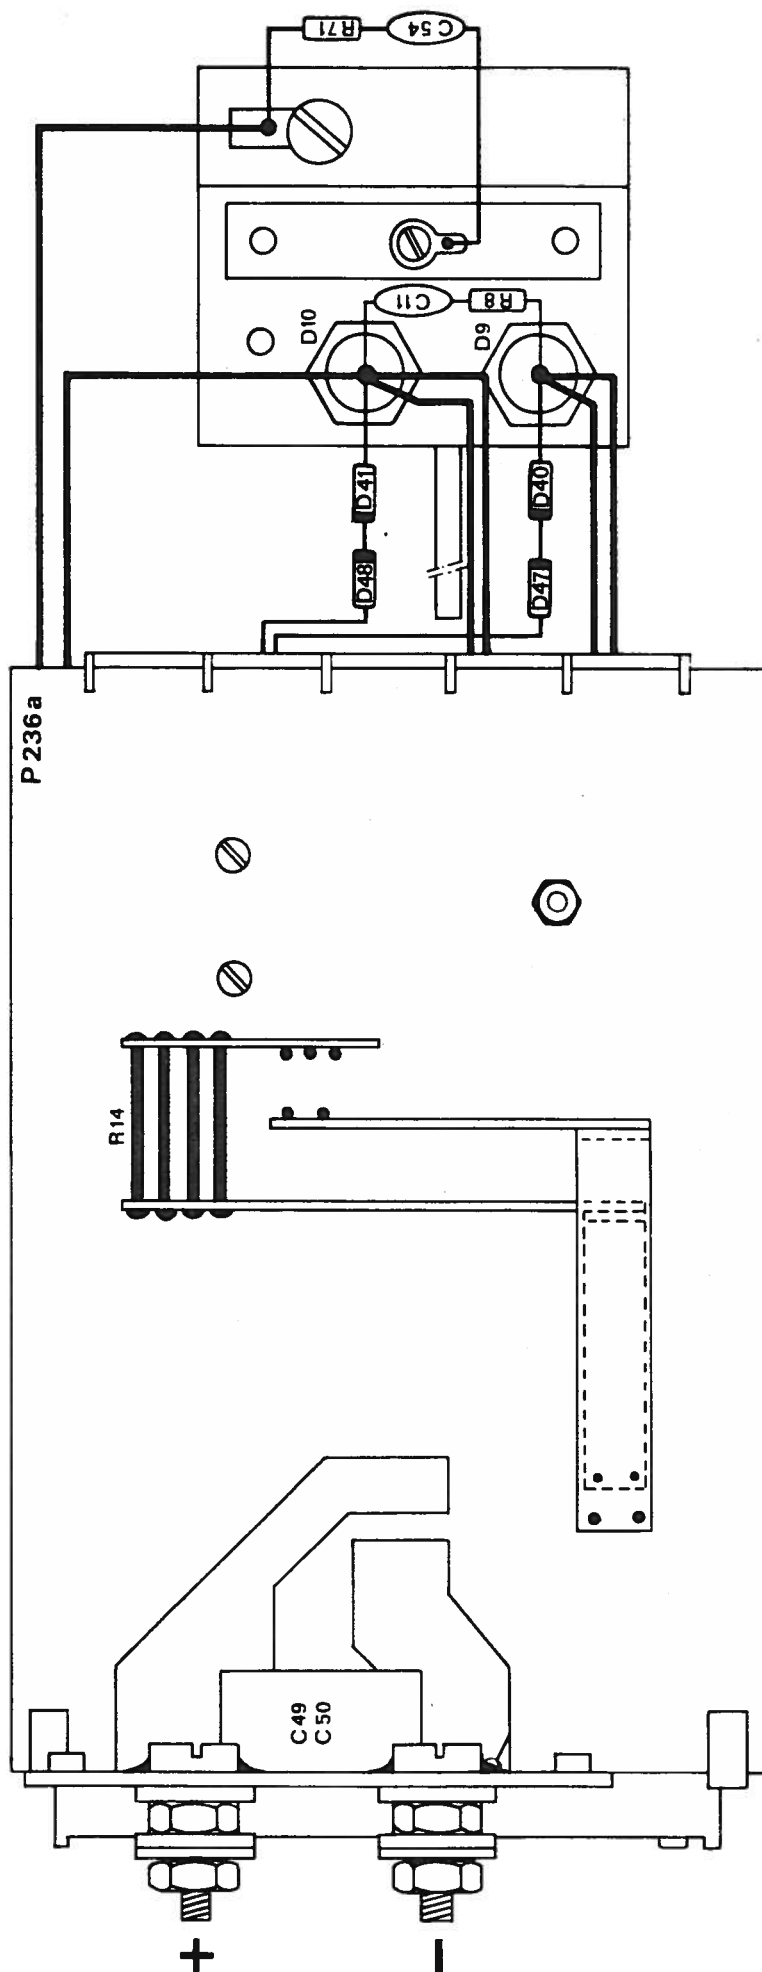


				Title: PC board		
				S 5 - 40		
Du7,48	1-'86	U7	Date:	2 - '80		
Modifications	Date	App	delta elektronika bv			

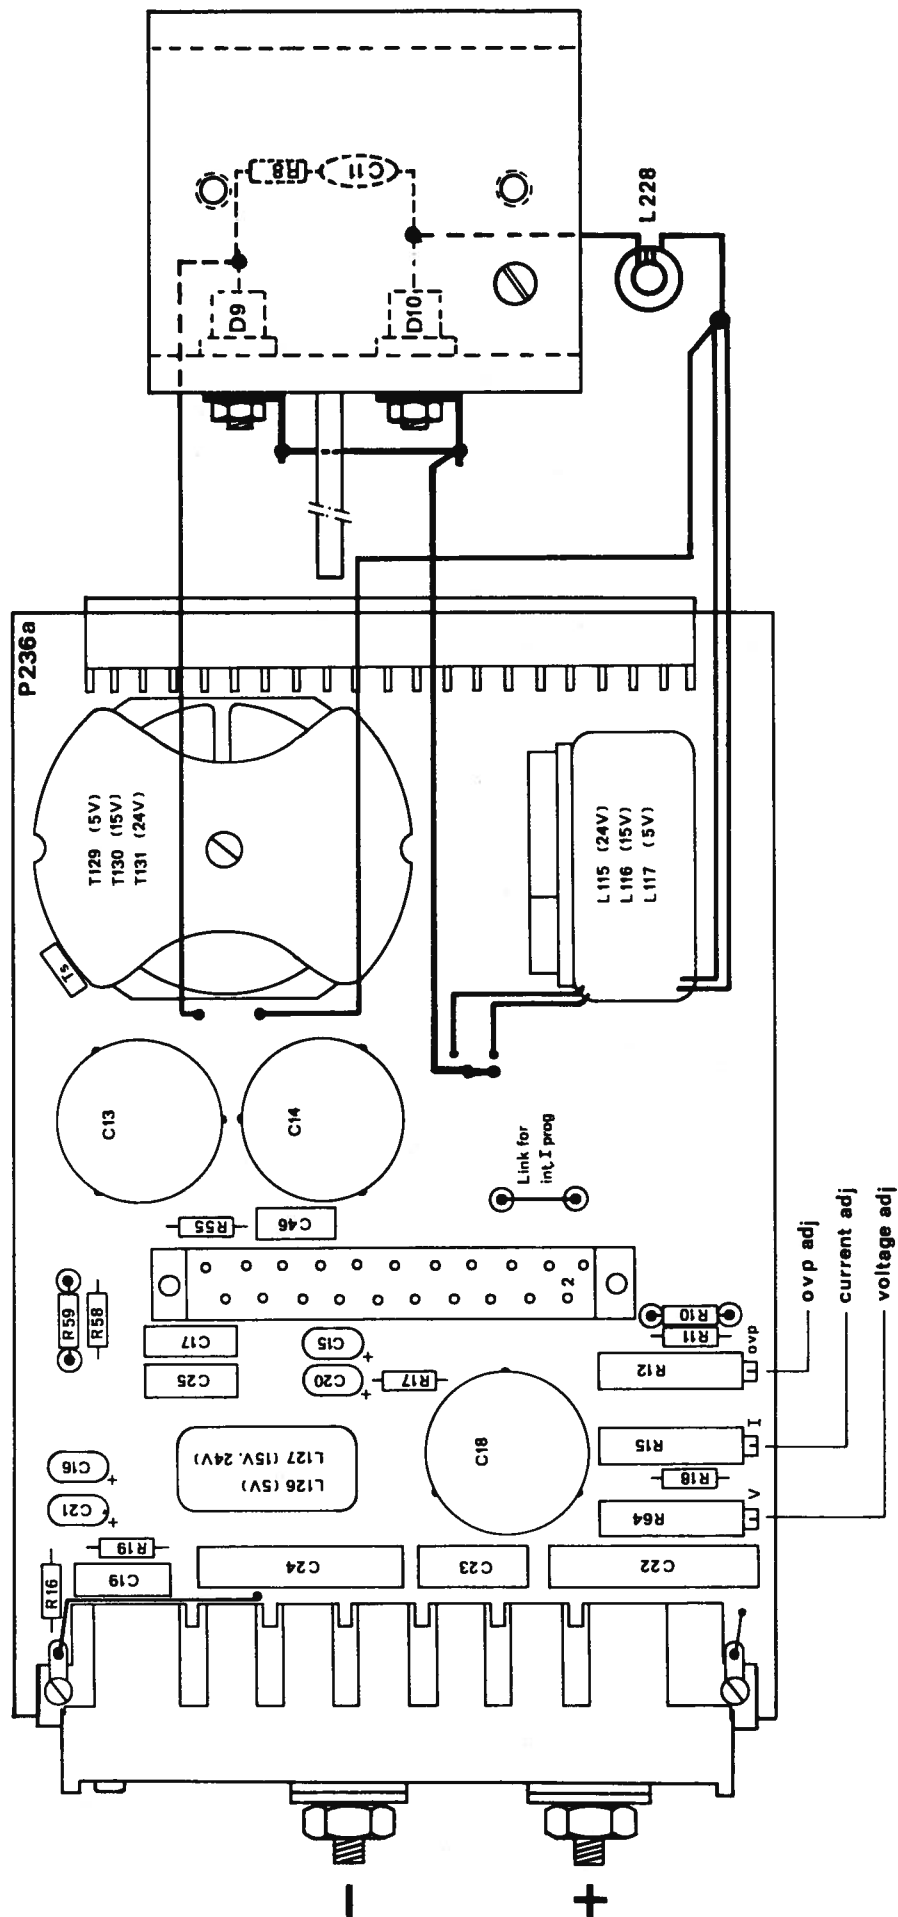


Title: PC board		S24 - 10	
L228		Date: 2 - '80	
Modifications		App	
		Date	
		delta elektronika bv	

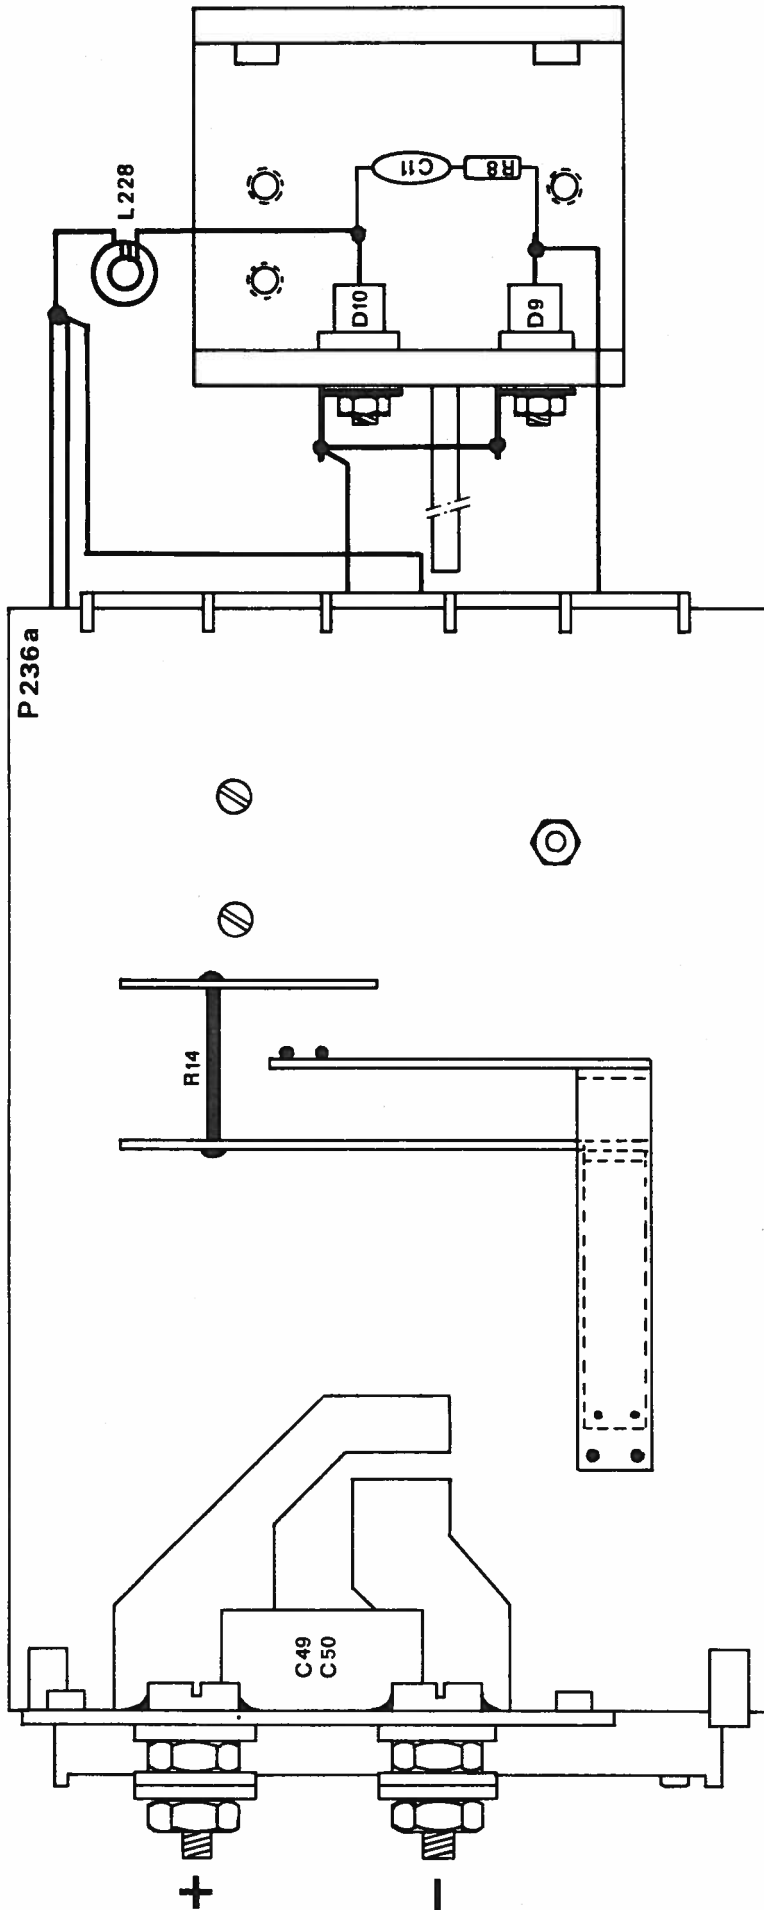



Title: PC board		S 24 - 10	
L 228		Date: 2 - '80	
Modifications		App. <i>U.</i>	
		Date	
		delta elektronika bv	

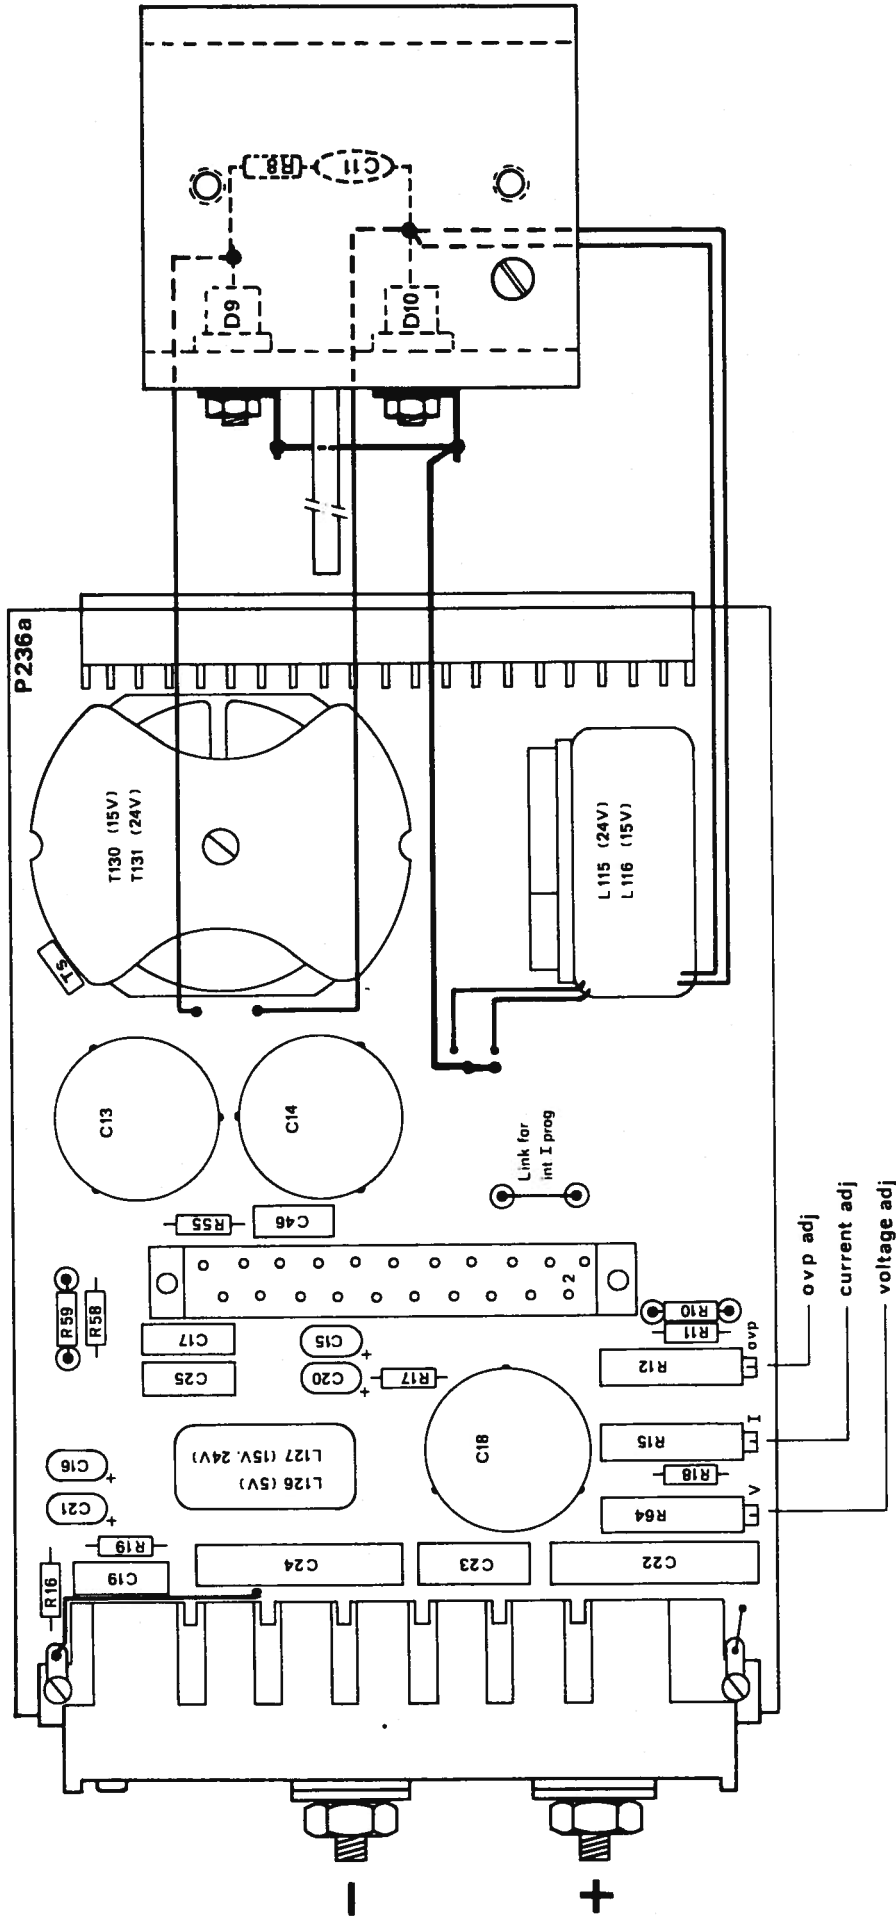

Title: PC board		S15 - 15	
P236 a		Date: 2 - '80	
Modifications		Date App	
		4-'81	
		Vr	
		Date	
		App	
		delta elektronika bv	

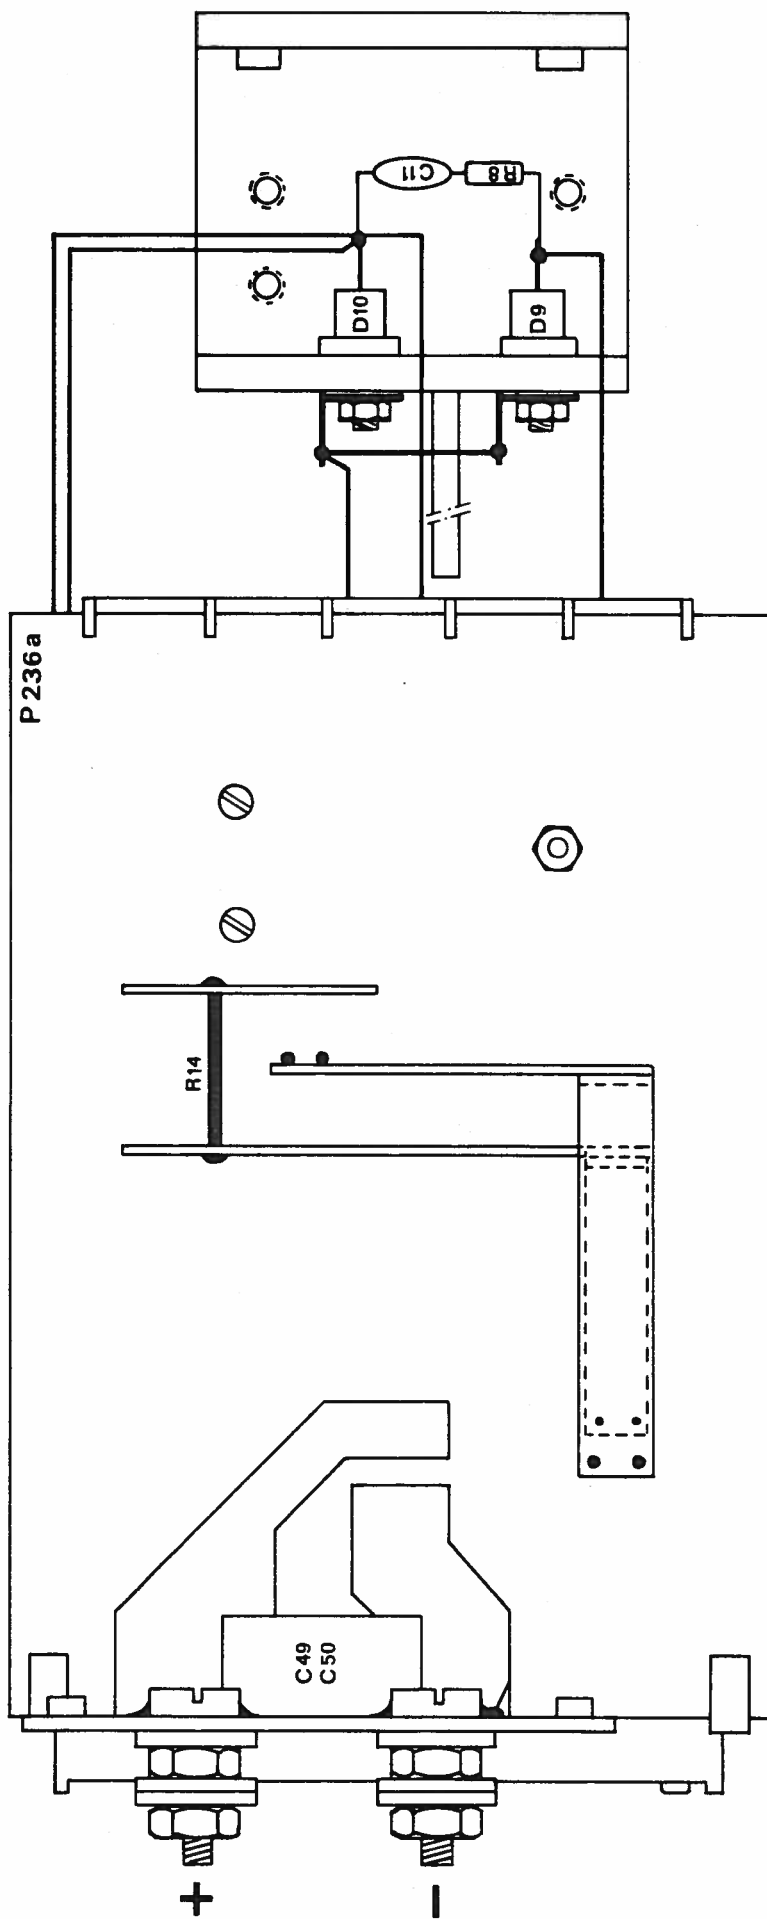


R74	1-'84	1/r	Title: PC board	delta
R74	5-'82	1/r	S15-15	
P 236 a	4-'81	1/r	Date: 2 - '80	
Modifications			Date	App
				delta elektronika bv

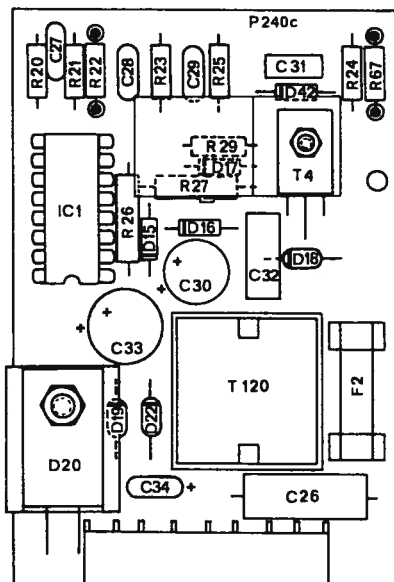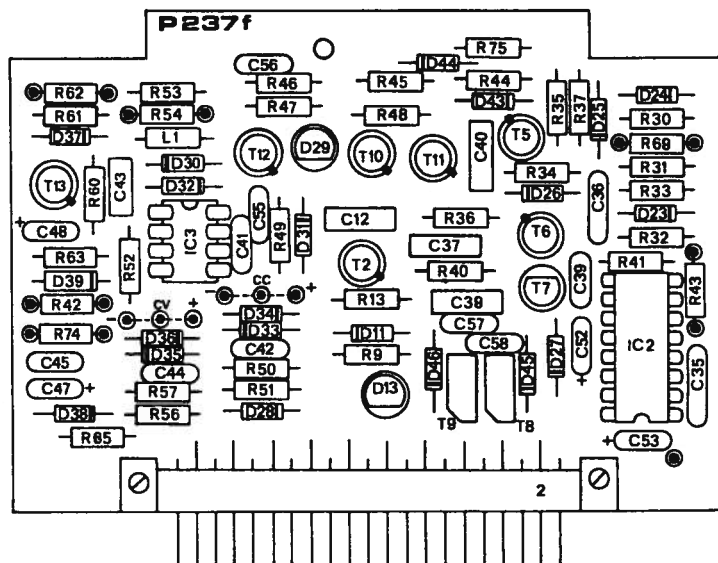


			Title: PC boards
			S5-40, S15-15, S24-10
P237f (L1, IC3)	2.86	Ur	Date: 8-'80
Modifications	Date	App.	delta elektronika bv




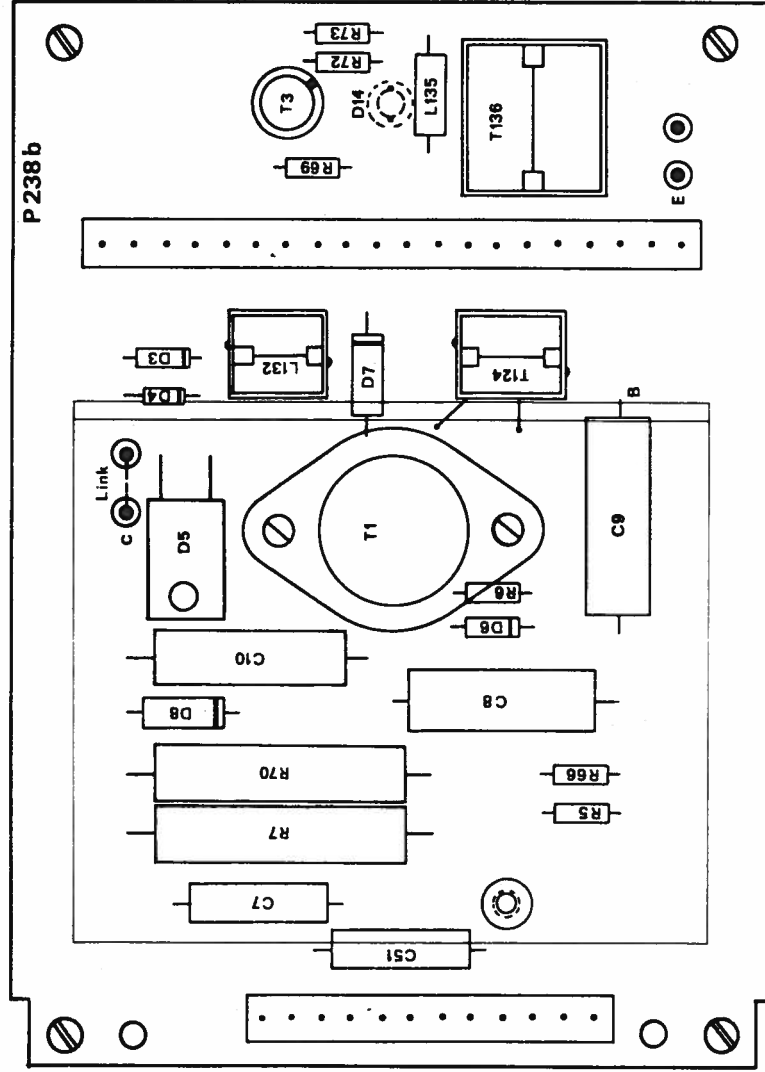

Title: PC board			
S5-40, S15-15, S24-10			
P238b (D5)	4.81	U	
Modifications	Date	App	delta elektronika bv

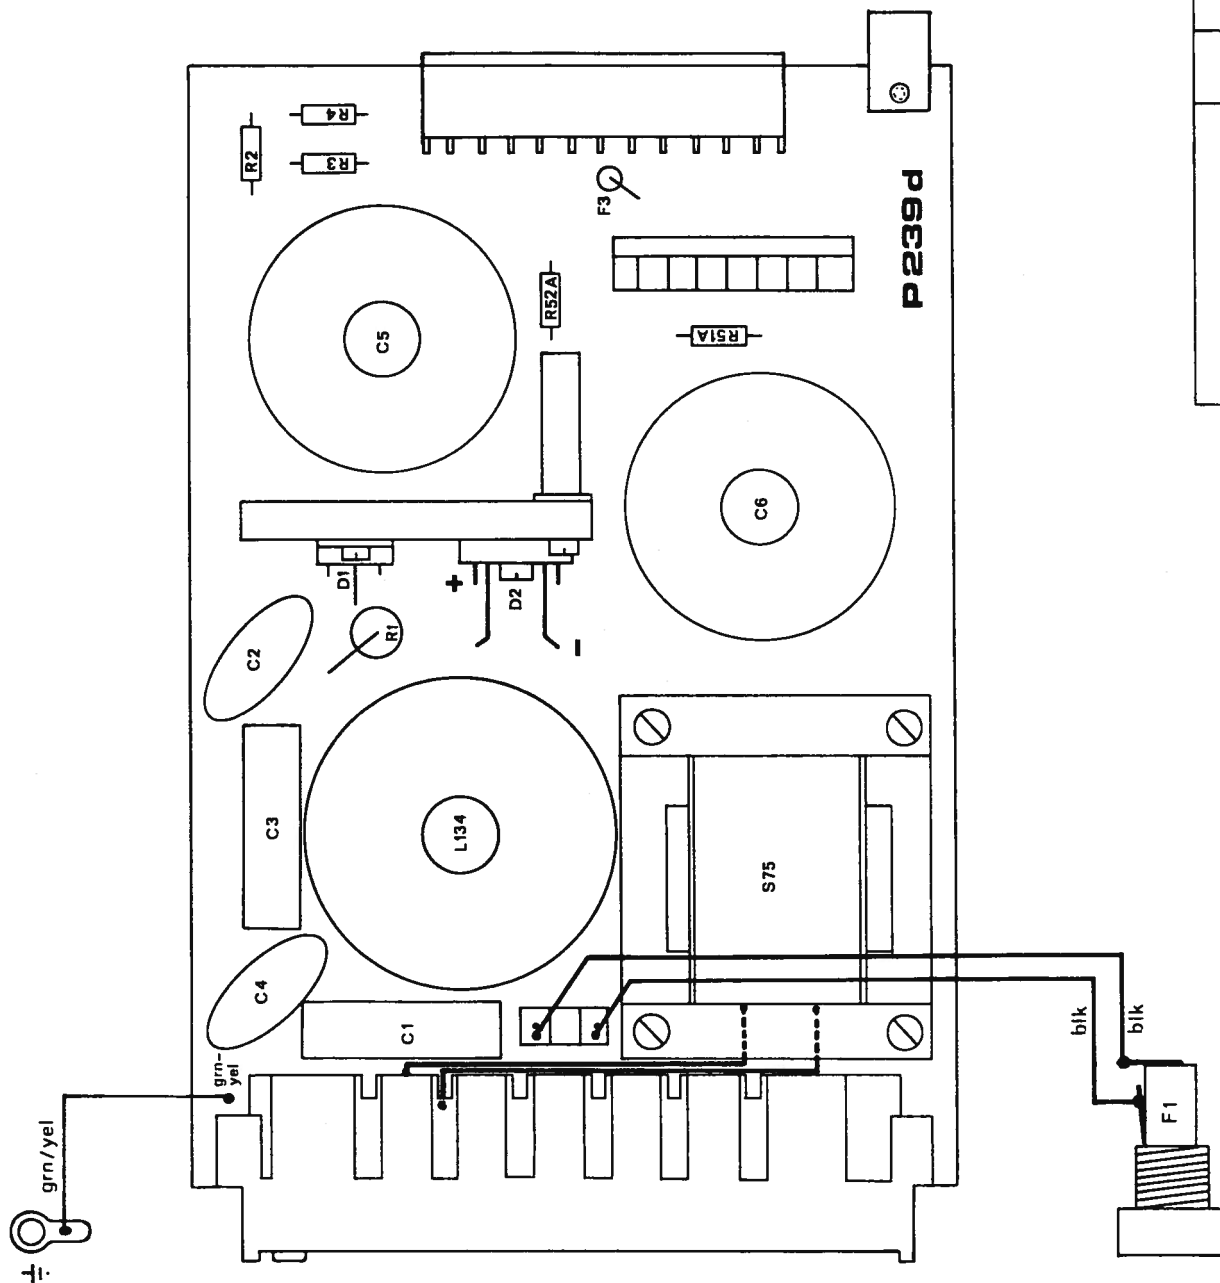

Title: PC board		S5-40, S15-15, S24-10	
P239 d		Date: 8-'80	
Modifications		Date	
		App	
		Date	
		delta elektronika bv	

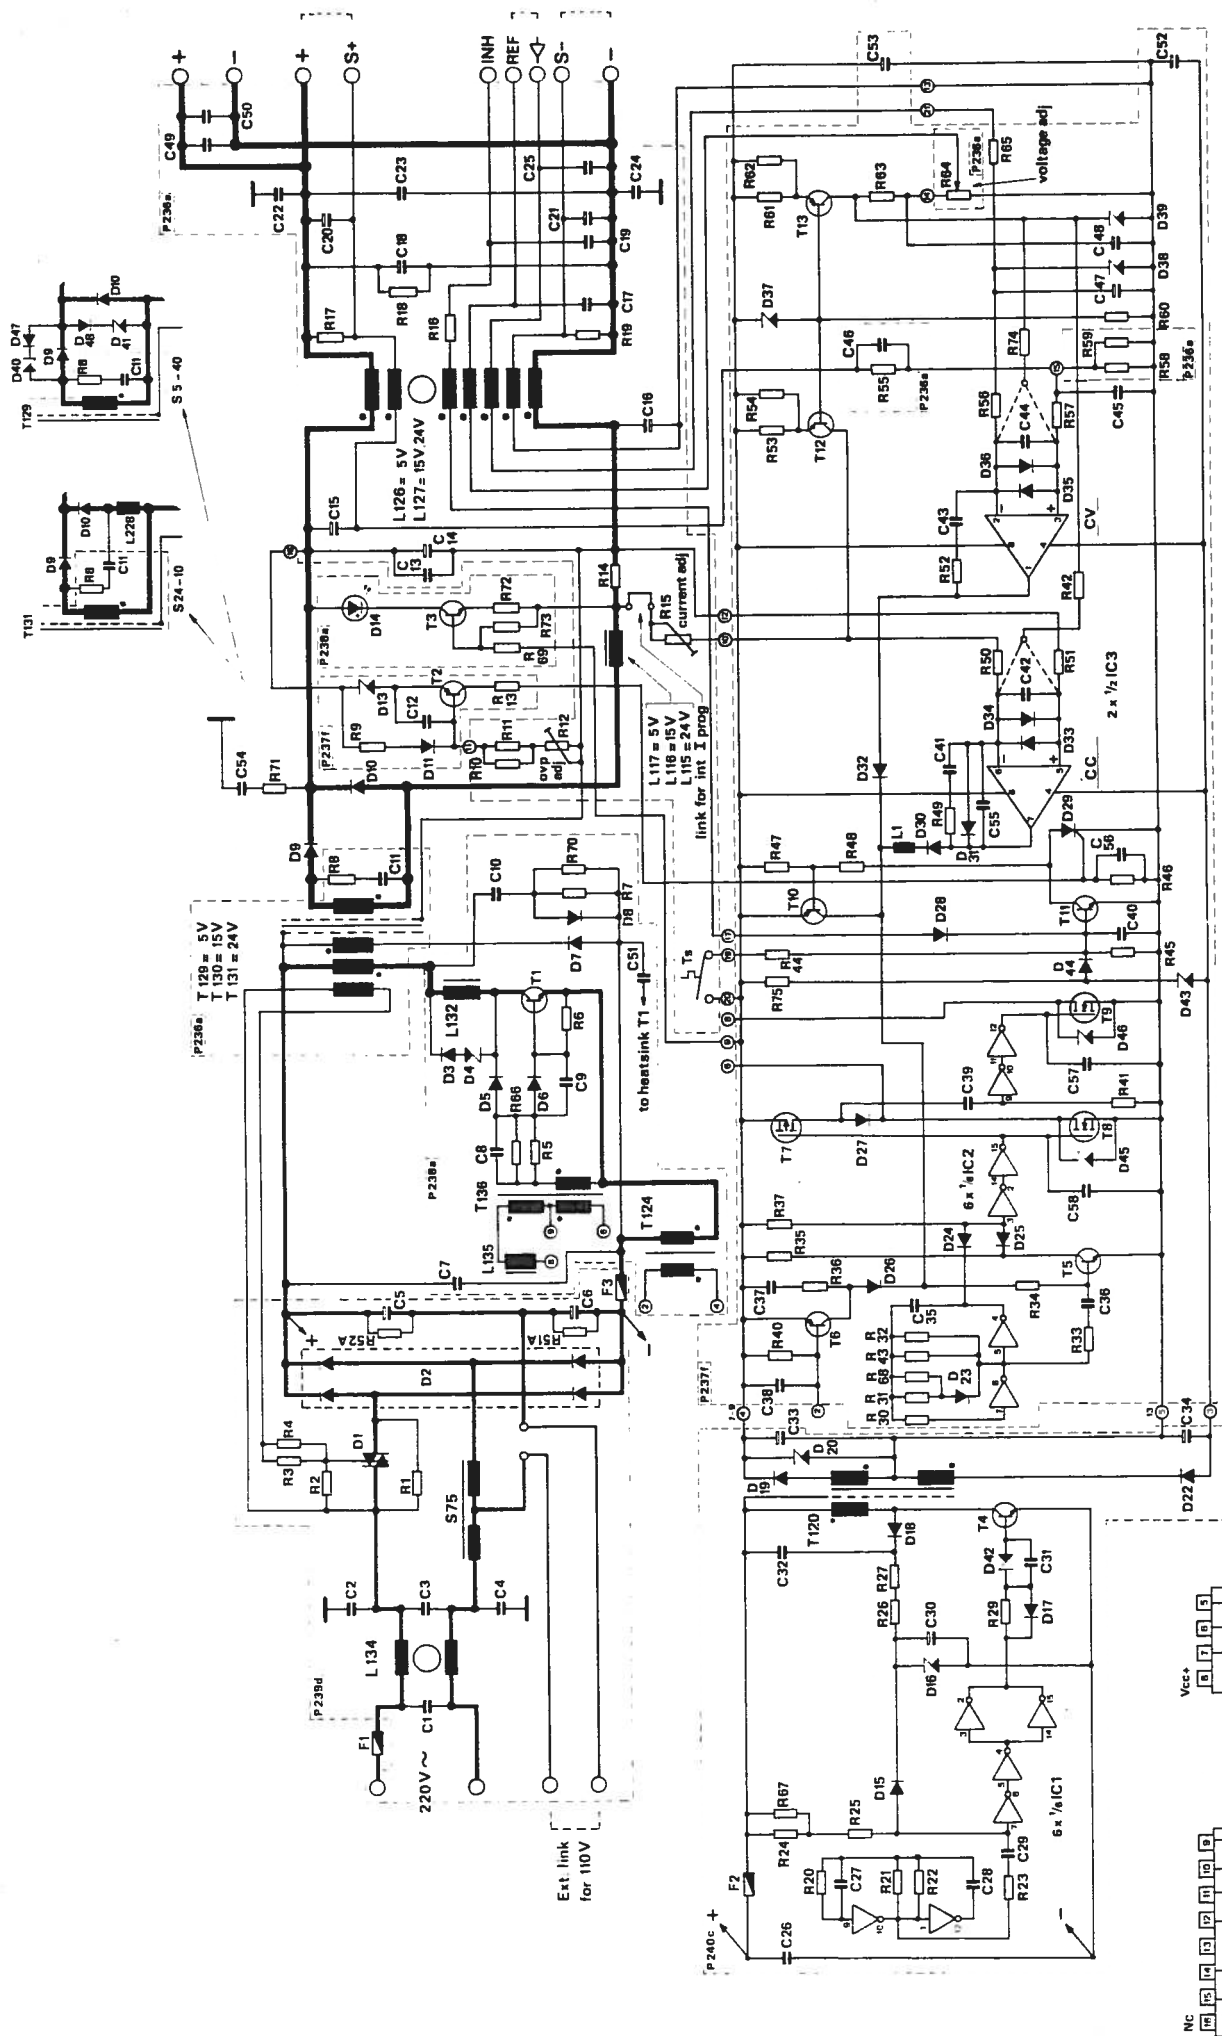

Title: Circuit diagram		S5-40, S15-15, S24-10	
L1, IC3 (P237f)		Date: 8-80	
Modifications	Date	App	delta elektronika bv

